




二片式聯結器

外觀尺寸圖

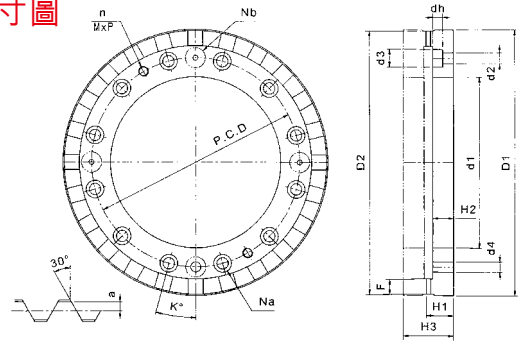

號碼 NO.	型號 Model NO.	外徑 Outside DIA D1	外徑 Outside DIA D2	內徑 Inside DIA d1	齒數 Number of teeth N	齒形 Teeth profile F	齒頂厚度 Topend thickness of teeth H1	齒厚 Inside thickness H2	總厚度 Total thickness H3	固定螺栓孔 Fixed bolt hole				定位梢孔 Positioning pin hole				退出螺栓孔 Withdraw bolt hole			齒頂圓面 Pitch of top end a	從齒頂圓面 Allowance of pitch top end $\pm A$	
										孔數 Number of holes Na	P.C.D. P.C.D.	孔徑 Hole DIA d2	上徑 Top DIA d3	孔深 Depth of hole dh	梢孔數 Number of pin hole Nb	P.C.D. P.C.D.	孔角 Angle of hole K°	外徑 Hole DIA d4	齒數 Number of teeth hole n	P.C.D. P.C.D.			齒規 Spec of teeth Mxp
1	24080-44XV	80	79	44	24	8	15.30	12.0	29	6	60	M8	11.0	8.8	4	55	30°	Ø2	6	60	M8x1.25	2	1.8
2	20100-40XV	100	98	40	20	9	18.37	14.0	34	6	60	6.6	11.0	6.0	3	60	30°	8	2	60	M8x1.25	1.37	1.22
3	24100-40XV	100	98	40	24	8	18.30	14.0	34	6	60	6.6	11.0	6.0	3	60	30°	8	2	60	M8x1.25	1.3	1.15
4	24120-60XV	120	118	60	24	8	18.30	14.0	34	6	80	6.6	11.0	6.0	4	80	30°	8	2	80	M8x1.25	1.3	1.15
5	30120-60XV	120	118	60	30	7	19.3	14.0	34	6	80	6.6	11.0	6.0	4	80	30°	8	2	80	M8x1.25	2.3	2
6	36140-80XV	140	138	80	36	11	18.52	14.0	34	6	100	6.6	11.0	6.0	3	100	30°	8	2	100	M8x1.25	2.5	2.2
7	24160-100XV	160	158	100	24	9	21.73	16.5	40	8	118	9.0	14.0	8.0	4	118	22.5°	10	2	118	M8x1.25	2.5	2.3
8	24180-120XV	180	178	120	24	9	21.61	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.61	1.44
9	36180-120XV	180	178	120	36	9	21.37	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.37	1.22
10	40180-120XV	180	178	120	40	9	21.76	16.5	40	8	140	9.0	14.0	8.0	3	140	22.5°	8	2	140	M8x1.25	1.76	1.57
11	24200-120XV	200	198	120	24	9	21.63	16.5	40	8	150	9.0	14.0	8.0	4	150	22.5°	8	2	150	M8x1.25	1.63	1.45
12	36200-120XV	200	198	120	36	11	21.52	16.5	40	8	150	9.0	14.0	8.0	3	150	22.5°	8	2	150	M8x1.25	1.52	1.36
13	72200-120XV	200	198	120	72	9	20.99	16.5	40	8	150	9.0	14.0	8.0	3	150	22.5°	8	2	150	M8x1.25	0.99	0.89
14	48210-135XV	210	208	135	48	13	21.71	16.5	40	12	165	9.0	14.0	8.0	3	158	15°	10	2	165	M8x1.25	1.71	1.53
15	60250-160XV	250	248	160	60	9	21.63	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.50	1.63	1.45
16	72250-160XV	250	248	160	72	11	21.42	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.50	1.42	1.27
17	360250-160XV	250	248	160	360	7	20.5	16.5	40	8	195	11.0	17.5	10.0	3	195	22.5°	10	2	195	M10x1.5	0.5	0.4
18	72280-190XV	280	278	190	72	11	21.42	16.5	40	8	222	13.0	20.2	12.0	3	222	22.5°	10	2	222	M10x1.50	1.42	1.27
19	360280-190XV	280	278	190	360	8	20.6	16.5	40	8	222	13.0	20.2	12.0	4	222	22.5°	10	2	222	M10x1.5	0.6	0.5
20	60320-210XV	320	318	210	60	11	30.46	25.5	58	10	258	13.0	20.2	12.0	4	258	18°	12	4	258	M12x1.75	1.46	1.30
21	72320-210XV	320	318	210	72	11	30.74	25.5	58	12	258	13.0	20.2	12.0	3	258	15°	12	4	258	M12x1.75	1.74	1.55
22	360320-210XV	320	318	210	360	9	29.6	25.5	58	12	258	13.0	20.2	12.0	3	258	15°	12	4	258	M12x1.75	0.6	0.5
23	48400-280XV	400	398	280	48	13	31.52	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.52	1.36
24	60400-280XV	400	398	280	60	15	31.82	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.82	1.62
25	72400-280XV	400	398	280	72	13	31.52	26.0	60	12	335	13.0	20.2	12.0	3	335	15°	12	4	335	M12x1.75	1.52	1.36
26	360400-280XV	400	398	280	360	13	30.6	26.0	60	12	335	13.0	20.0	12.0	3	335	15°	12	4	335	M12x1.75	0.6	0.5
27	48520-415XV	520	518	415	48	15	31.97	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	1.97	1.76
28	72520-415XV	520	518	415	72	15	31.97	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	1.97	1.76
29	360520-415XV	520	518	415	360	15	30.8	26.0	60	12	450	13.0	20.2	12.0	3	450	15°	12	4	450	M12x1.75	0.8	0.7
30	60600-480XV	600	598	480	60	15	36.95	29.0	70	12	530	17.0	26.0	16.0	4	530	15°	12	4	530	M12x1.75	1.95	1.74
31	72600-480XV	600	598	480	72	19	37.28	29.0	70	12	530	17.0	26.0	16.0	3	530	15°	12	4	530	M12x1.75	2.28	2.04
32	360600-480XV	600	598	480	360	15	36	29.0	70	12	530	17.0	26.0	16.0	3	530	15°	12	4	530	M12x1.75	1	0.9
33	72700-560XV	700	698	560	72	19	36.70	29.0	70	12	610	17.0	26.0	16.0	3	610	15°	14	4	610	M12x1.75	1.70	1.50
34	360700-560XV	700	698	560	360	19	36	29.0	70	12	610	17.0	26.0	16.0	3	610	15°	14	4	610	M12x1.75	1	0.9
35	721000-830XV	1000	998	830	72	22	61.70	54.5	120	18	900	17.0	26.0	16.0	4	900	10°	-	4	900	M12x1.75	1.70	1.50
36	3601000-830XV	1000	998	830	360	22	61.5	54.5	120	18	900	17.0	26.0	16.0	4	900	10°	-	4	900	M12x1.75	1.75	1.4
37	721200-1000XV	1200	1198	1000	72	22	71.70	64.5	140	20	1080	21.0	32.0	20.0	4	1080	9°	-	4	1080	M16x2.00	1.70	1.50
38	3601200-1000XV	1200	1198	1000	360	22	71.6	64.5	140	20	1080	21.0	32.0	20.0	4	1080	9°	-	4	1080	M16x2.00	1.6	1.5